

Stainless Steel Grab Bar

*wingit compatible

Configuration: 01

Grab Bar

Twist-Lock Concealed

Application Use:

Architectural

Commercial

Institutional

Residential


Specifications

Straight Grab Bar with snap on / twist-Lock concealed flange.
Manufactured by ELCOMA from 18 gauge, type 304 stainless steel, satin finished, tubing. 14 gauge stainless steel mounting flanges, heliarc welded to the tube to form a single structural unit. Elcoma Grab Bars are made standard with 1.5" wall clearance and are designed, built & tested to withstand 900lbs. (408kgs) of load when properly installed.* This exceeds HUD, FHA, VA, ADA, ANSI and other federal, provincial, and local codes.
*Grab Bars can only be as strong as what they are mounted to. It is imperative when installing any safety product to consult with a qualified contractor to insure you have sufficient backing.




Custom sizes are available to suit special requirements.

The exclusive ELCOMA concealed flange system adapts both "Twist-Lock" and "Snap-On" compatibilities making installation a breeze. ELCOMA Grab Bars come in 1", 1.25" & 1.5" Diameters with a variety of finishes & coatings.

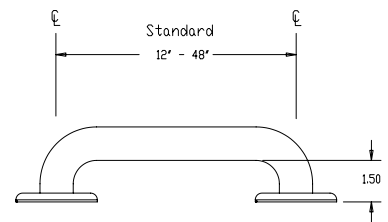

Bar Diameter:	1", 1.25" , & 1.5"
Bar Grip:	Smooth, Peened, Knurled, Shur-Grip (available in 1.25" only)
Standard Flange:	Twist-Lock / Snap-On concealed * Wingit Compatible
Optional Flanges:	Bolt, Exposed, & Female Thread Insert
Standard Finishes:	Satin Finish, White or Almond Powder Coating
Custom Finishes:	Multiple colors & finishes available, call your representative or visit www.elcoma.com for selection grid.
Configurations:	visit www.elcoma.com for configuration options.

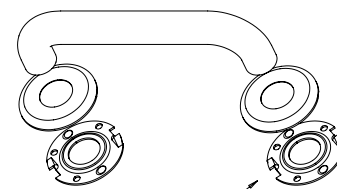

Flange base has 5 mounting hole options